








# Super-high speed specification assembly machine

## THI-AVH

## WASHER ASSEMBLY MACHINE



Threads without points					Power	Washer feeding	Weight (net)	
Min	Max	Min	Max	Max dia.				
								
120	220	M8	M12	φ 30	60* ∩ 150	0.4kW (Main)	φ 350 or φ 400	1,000kg

\*Changes according to the number of supply rows in the supply unit

- Our originally developed washer chute is perfect for high-speed work, and can be easily and quickly set up just by loosening one bolt.
- Changes to the assembled rivet length can be handled immediately. The top/bottom adjustment margin is wide at approx. 100mm, and can be carried out centrally from the front of the machine with simple button operations. (Washer/part feeder base motorized elevation mechanism incorporated)
- All assembly misses are caught at the electronic straight feeder.



### Washer supply process

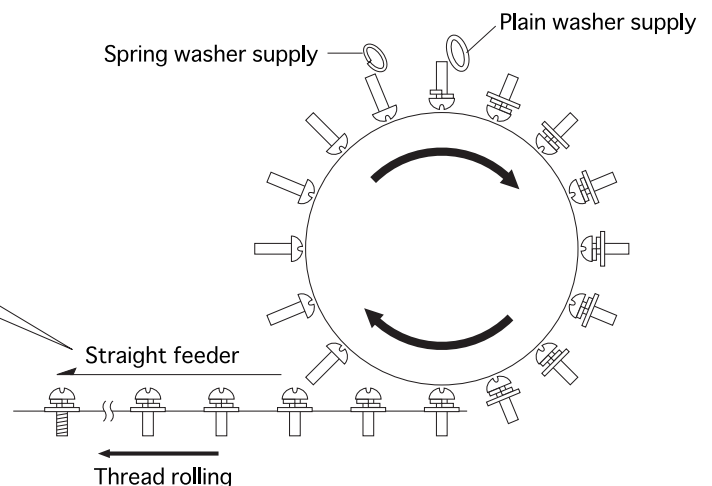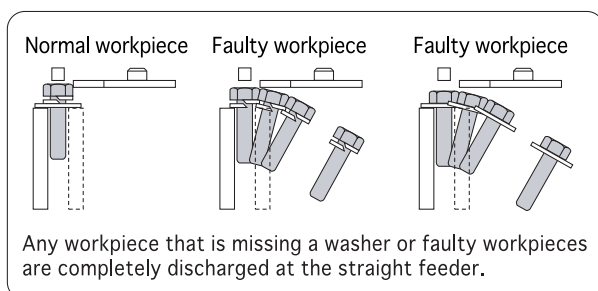

\* Use your browser's Print button to print this page.